


PLUG, STRAIGHT STYLE MDH, MSH, MCH

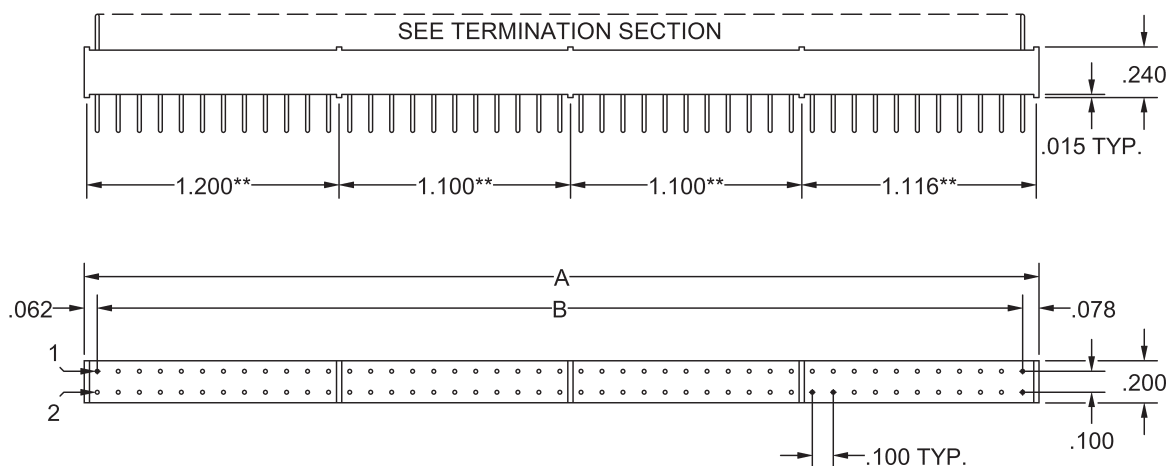

NOTES:

- SEE APPENDIX FOR GUIDE HARDWARE OPTIONS. GUIDES ARE INSTALLED IN CONTACT LOCATIONS AND RESULT IN THE LOSS OF ONE CONTACT FOR EACH GUIDE; E.G. A 22 CONTACT SIZE CONNECTOR WITH 2 GUIDES WILL HAVE 20 CONTACTS. THIS WILL BE REFLECTED IN THE VARIATION CODE. EXAMPLE: HGC022MDG9---E020.
- *SIZES BELOW 22 CONTACT WILL RESULT IN THE LOSS OF ONE OR MORE SOLDER RELIEF STANDOFFS UNLESS GUIDE PINS ARE EMPLOYED.
- **DIMENSIONS ARE FOR THE 90 CONTACT VERSION AND ARE SUPPLIED TO SHOW LOCATION OF SOLDER RELIEF STANDOFFS.

SIZE*	A	B
22	1.14	1.000
24	1.22	1.100
26	1.32	1.200
28	1.42	1.300
30	1.52	1.400
32	1.62	1.500
34	1.72	1.600
36	1.82	1.700
38	1.92	1.800
40	2.02	1.900
42	2.12	2.000
44	2.22	2.100

SIZE*	A	B
46	2.32	2.200
48	2.42	2.300
50	2.52	2.400
52	2.62	2.500
54	2.72	2.600
56	2.82	2.700
58	2.92	2.800
60	3.02	2.900
62	3.12	3.000
64	3.22	3.100
66	3.32	3.200
68	3.42	3.300

SIZE*	A	B
70	3.52	3.400
72	3.62	3.500
74	3.72	3.600
76	3.82	3.700
78	3.92	3.800
80	4.02	3.900
82	4.12	4.000
84	4.22	4.100
86	4.32	4.200
88	4.42	4.300
90	4.54	4.400