


ORDERING CHART

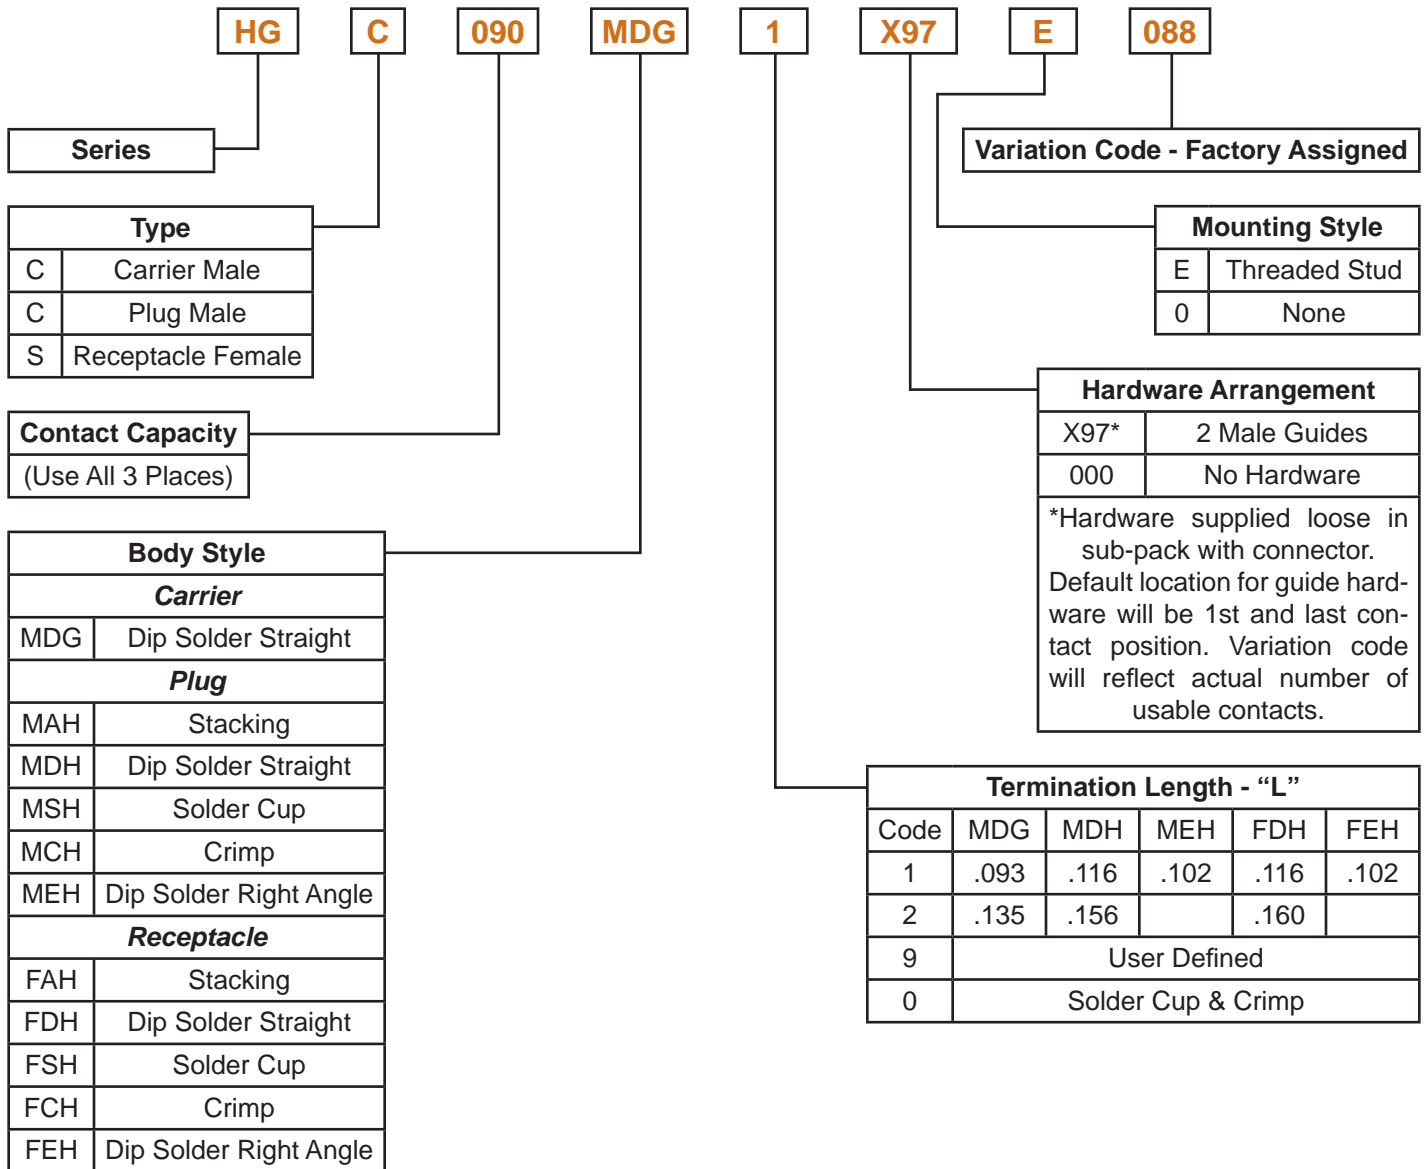

**Series**

Type	
C	Carrier Male
C	Plug Male
S	Receptacle Female

**Contact Capacity**  
(Use All 3 Places)

Body Style	
Carrier	
MDG	Dip Solder Straight
Plug	
MAH	Stacking
MDH	Dip Solder Straight
MSH	Solder Cup
MCH	Crimp
MEH	Dip Solder Right Angle
Receptacle	
FAH	Stacking
FDH	Dip Solder Straight
FSH	Solder Cup
FCH	Crimp
FEH	Dip Solder Right Angle

**Variation Code - Factory Assigned**

Mounting Style	
E	Threaded Stud
0	None

Hardware Arrangement	
X97*	2 Male Guides
000	No Hardware

\*Hardware supplied loose in sub-pack with connector. Default location for guide hardware will be 1st and last contact position. Variation code will reflect actual number of usable contacts.

Termination Length - "L"					
Code	MDG	MDH	MEH	FDH	FEH
1	.093	.116	.102	.116	.102
2	.135	.156		.160	
9	User Defined				
0	Solder Cup & Crimp				