


PIN, COMPLIANT
STYLE MV
STYLE PV

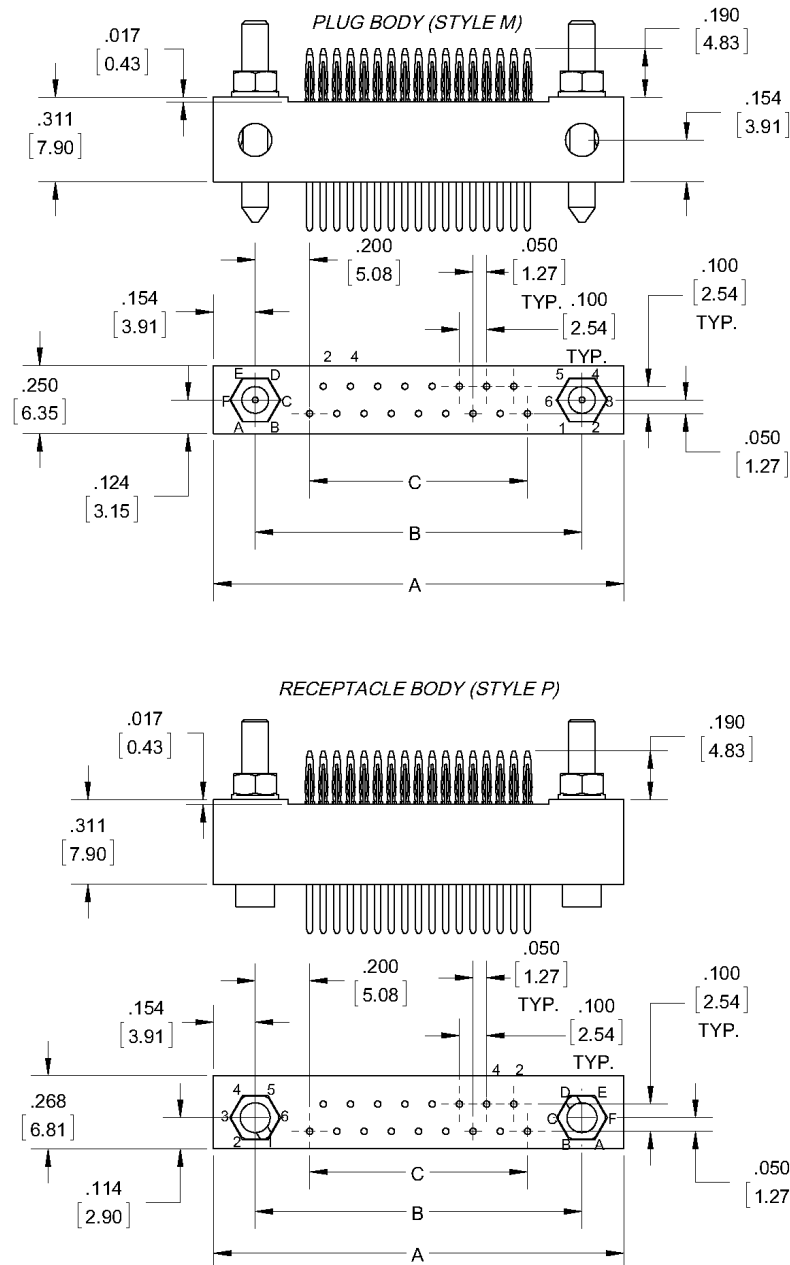

No. of Contacts	A	B	C
17	1.508 [38.30]	1.200 [30.48]	0.800 [20.32]
29	2.106 [53.49]	1.800 [45.72]	1.400 [35.56]
33	2.308 [58.62]	2.000 [50.80]	1.600 [40.64]
41	2.708 [68.78]	2.400 [60.96]	2.000 [50.80]
53	3.308 [84.02]	3.000 [76.20]	2.600 [66.04]
65	3.908 [99.26]	3.600 [91.44]	3.200 [81.28]

**REFER TO APPENDIX FOR TERMINATION DETAILS,
HARDWARE STYLES, AND PWB PATTERNS**