


**PIN, RIGHT ANGLE
STYLE ME
*STYLE PE**

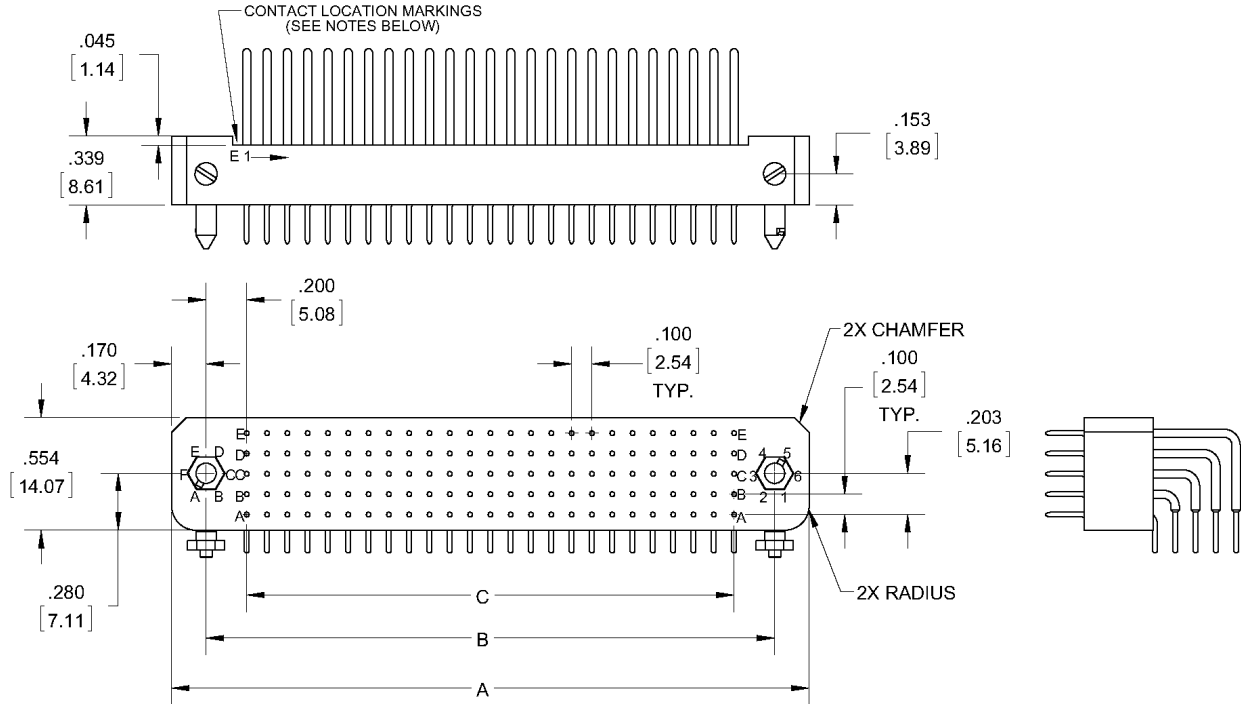

***CONTACT LOCATION MARKING NOTES**
 - PLUG (STYLE M) HAS MARKINGS ON CHAMFER SIDE
 - RECEPTACLE (STYLE P) HAS MARKINGS ON RADIUS SIDE
 - FOR REVERSE SEE ORDERING CHART

REFER TO APPENDIX FOR TERMINATION DETAILS,
 HARDWARE STYLES, AND PWB PATTERNS

No. of Contacts	A	B	C
125	3.140 [79.76]	2.800 [71.12]	2.400 [60.96]
140	3.440 [87.38]	3.100 [78.74]	2.700 [68.58]
160	3.840 [97.54]	3.500 [88.90]	3.100 [78.74]
200	4.640 [117.86]	4.300 [109.22]	3.900 [99.06]
230	5.240 [133.10]	4.900 [124.46]	4.500 [114.30]
240	5.440 [138.18]	5.100 [129.54]	4.700 [119.38]