


**SOCKET, RIGHT ANGLE**  
**STYLE FE**  
**\*STYLE SE**

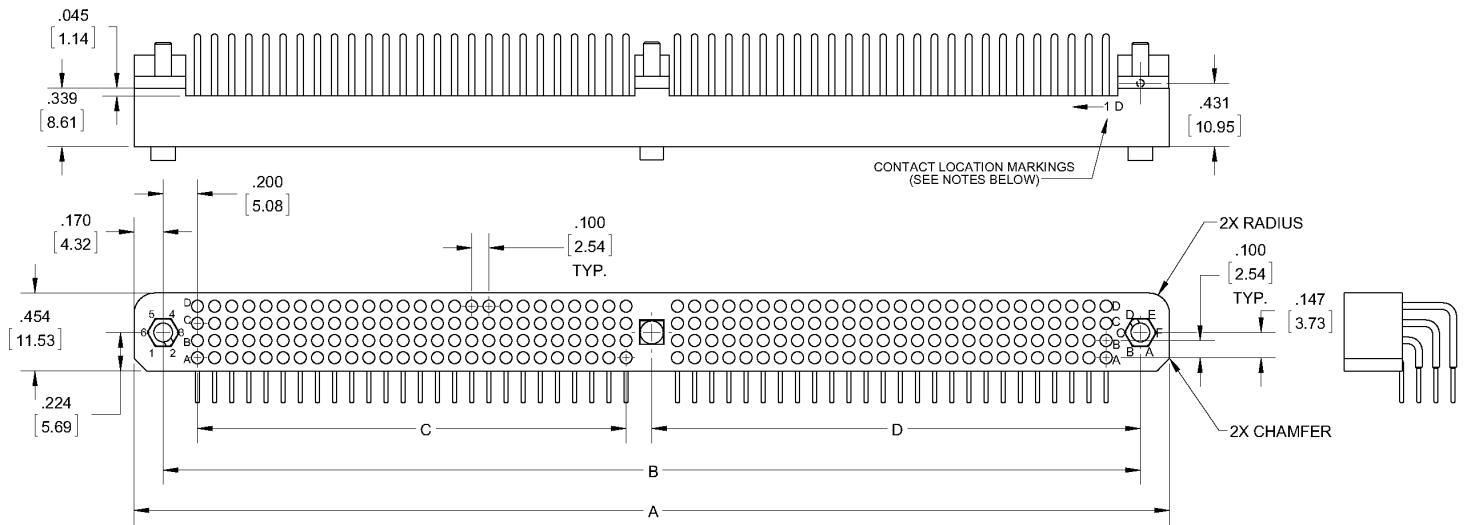

**\*CONTACT LOCATION MARKING NOTES**  
 - PLUG (STYLE S) HAS MARKINGS ON CHAMFER SIDE  
 - RECEPTACLE (STYLE F) HAS MARKINGS ON RADIUS SIDE  
 - FOR REVERSE SEE ORDERING CHART

**REFER TO APPENDIX FOR TERMINATION DETAILS,  
 HARDWARE STYLES, AND PWB PATTERNS**

No. of Contacts	A	B	C	D
208	6.040 [153.42]	5.700 [144.78]	2.500 [63.50]	2.850 [72.39]
240	6.840 [173.74]	6.500 [165.10]	2.900 [73.66]	3.250 [82.55]
264	7.438 [188.92]	7.100 [180.34]	3.200 [81.28]	3.550 [90.17]
352	9.640 [244.86]	9.300 [236.22]	4.300 [109.22]	4.650 [118.11]
392	10.640 [270.26]	10.300 [261.62]	4.800 [121.92]	5.150 [130.81]