


PIN, STRAIGHT
STYLE MC, MD, MS, MW
***STYLE PC, PD, PS, PW**

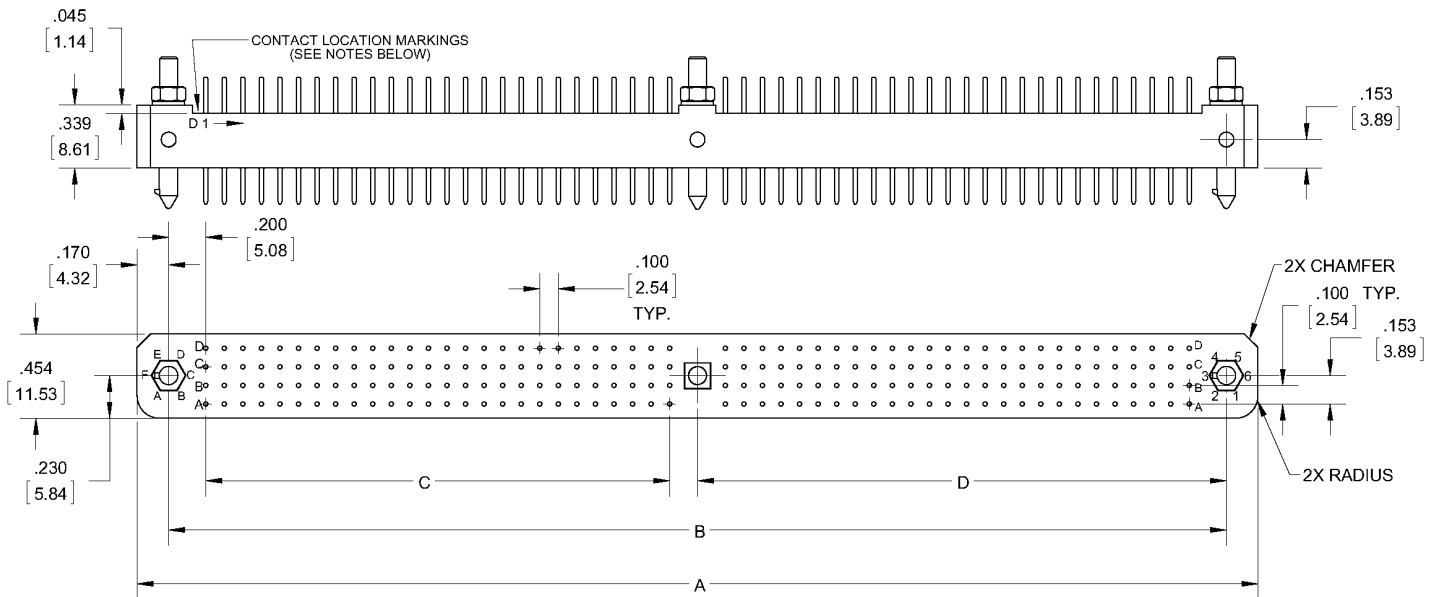

***CONTACT LOCATION MARKING NOTES**

- PLUG (STYLE M) HAS MARKINGS ON CHAMFER SIDE
- RECEPTACLE (STYLE P) HAS MARKINGS ON RADIUS SIDE
- FOR REVERSE SEE ORDERING CHART

REFER TO APPENDIX FOR TERMINATION DETAILS,
 HARDWARE STYLES, AND PWB PATTERNS

| No. of Contacts | A | B | C | D |
|-----------------|-----------------|-----------------|----------------|----------------|
| 208 | 6.040 [153.42] | 5.700 [144.78] | 2.500 [63.50] | 2.850 [72.39] |
| 240 | 6.840 [173.74] | 6.500 [165.10] | 2.900 [73.66] | 3.250 [82.55] |
| 264 | 7.438 [188.92] | 7.100 [180.34] | 3.200 [81.28] | 3.550 [90.17] |
| 352 | 9.640 [244.86] | 9.300 [236.22] | 4.300 [109.22] | 4.650 [118.11] |
| 392 | 10.640 [270.26] | 10.300 [261.62] | 4.800 [121.92] | 5.150 [130.81] |