


PIN, STRAIGHT
STYLE MC, MD, MS, MW
***STYLE PC, PD, PS, PW**

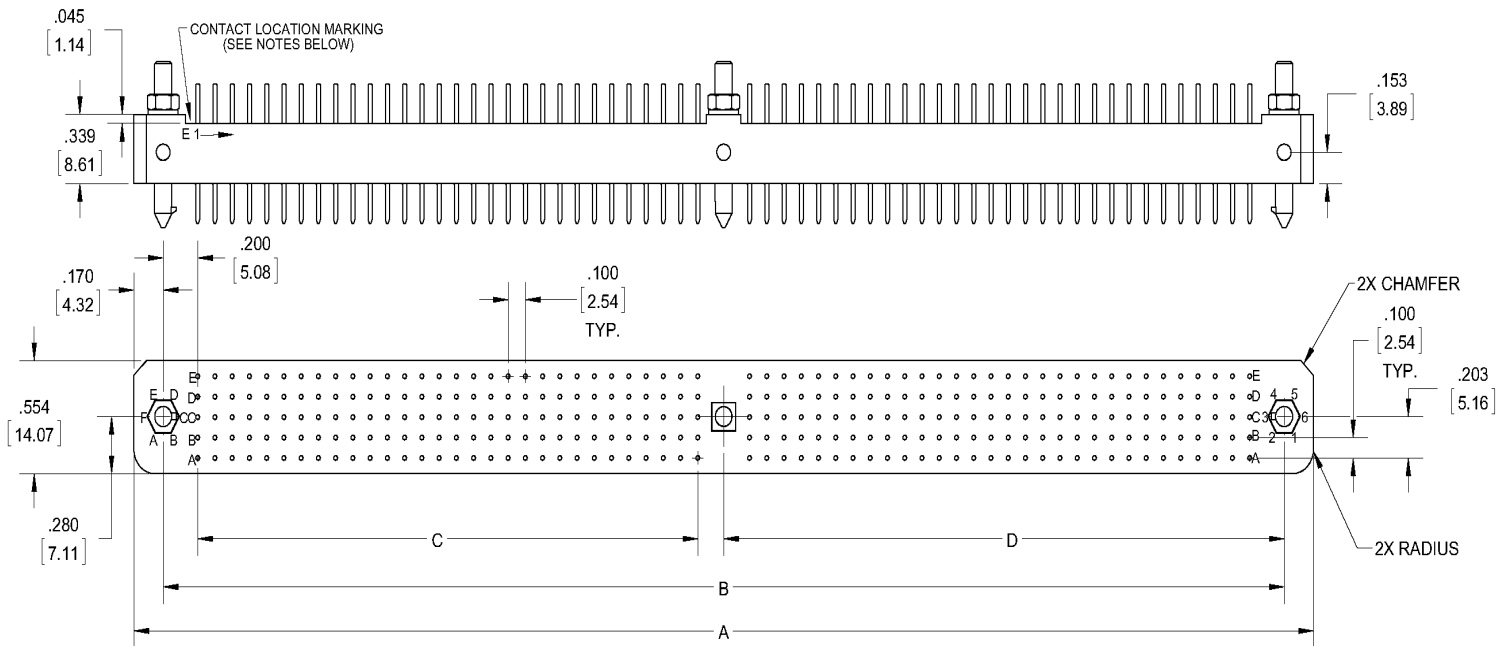

****CONTACT LOCATION MARKING NOTES***

- PLUG (STYLE M) HAS MARKINGS ON CHAMFER SIDE
- RECEPTACLE (STYLE P) HAS MARKINGS ON RADIUS SIDE
- FOR REVERSE SEE ORDERING CHART

**REFER TO APPENDIX FOR TERMINATION DETAILS,
 HARDWARE STYLES, AND PWB PATTERNS**

No. of Contacts	A	B	C	D
300	6.840 [173.74]	6.500 [165.1]	2.900 [73.66]	3.250 [82.55]
320	7.240 [183.90]	6.900 [175.26]	3.100 [78.74]	3.450 [87.63]
330	7.440 [188.98]	7.100 [180.34]	3.200 [81.28]	3.550 [90.17]
390	8.640 [219.46]	8.300 [210.82]	3.800 [96.52]	4.150 [105.41]
490	10.640 [270.26]	10.300 [261.62]	4.800 [121.92]	5.150 [130.81]