


## ORDERING CHART 8-ROW

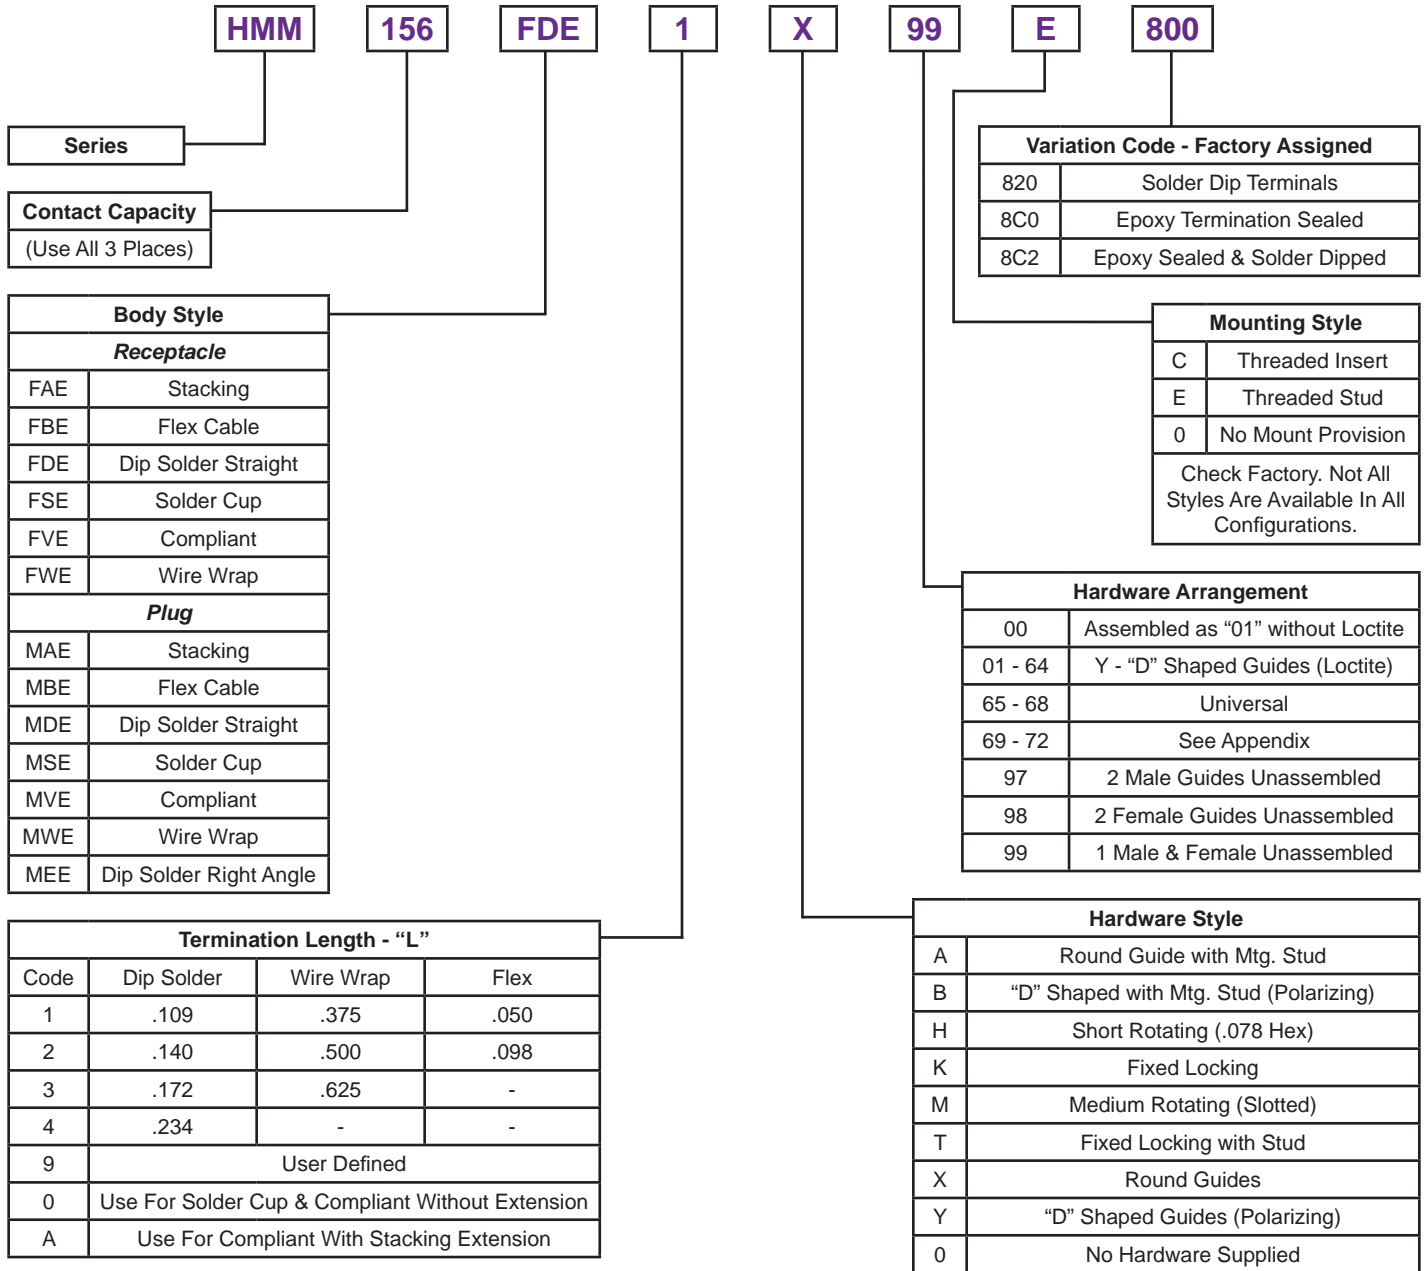

**Series**

**Contact Capacity**  
(Use All 3 Places)

Body Style	
<b>Receptacle</b>	
FAE	Stacking
FBE	Flex Cable
FDE	Dip Solder Straight
FSE	Solder Cup
FVE	Compliant
FWE	Wire Wrap
<b>Plug</b>	
MAE	Stacking
MBE	Flex Cable
MDE	Dip Solder Straight
MSE	Solder Cup
MVE	Compliant
MWE	Wire Wrap
MEE	Dip Solder Right Angle

Termination Length - "L"			
Code	Dip Solder	Wire Wrap	Flex
1	.109	.375	.050
2	.140	.500	.098
3	.172	.625	-
4	.234	-	-
9	User Defined		
0	Use For Solder Cup & Compliant Without Extension		
A	Use For Compliant With Stacking Extension		

Variation Code - Factory Assigned	
820	Solder Dip Terminals
8C0	Epoxy Termination Sealed
8C2	Epoxy Sealed & Solder Dipped

Mounting Style	
C	Threaded Insert
E	Threaded Stud
0	No Mount Provision
Check Factory. Not All Styles Are Available In All Configurations.	

Hardware Arrangement	
00	Assembled as "01" without Loctite
01 - 64	Y - "D" Shaped Guides (Loctite)
65 - 68	Universal
69 - 72	See Appendix
97	2 Male Guides Unassembled
98	2 Female Guides Unassembled
99	1 Male & Female Unassembled

Hardware Style	
A	Round Guide with Mtg. Stud
B	"D" Shaped with Mtg. Stud (Polarizing)
H	Short Rotating (.078 Hex)
K	Fixed Locking
M	Medium Rotating (Slotted)
T	Fixed Locking with Stud
X	Round Guides
Y	"D" Shaped Guides (Polarizing)
0	No Hardware Supplied