



PLUG, STACKING STYLE MAE

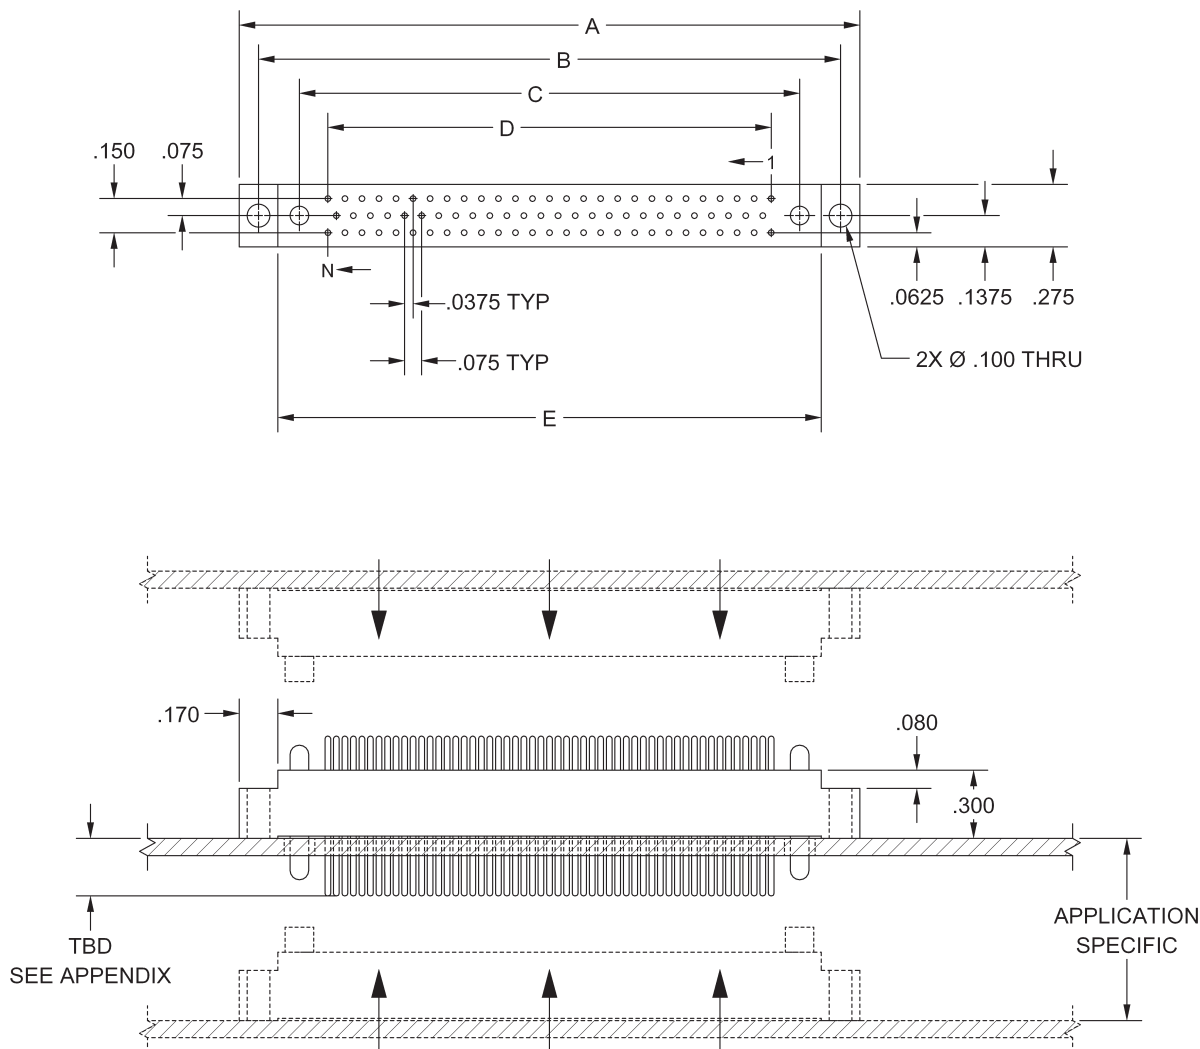

'N' Contacts	DIMENSIONS				
	A	B	C	D	E
011	1.005	.835	.475	.225	.665
023	1.305	1.135	.775	.525	.965
035	1.605	1.435	1.075	.825	1.265
047	1.905	1.735	1.375	1.125	1.565
059	2.205	2.035	1.675	1.425	1.865
071	2.505	2.335	1.975	1.725	2.165
080	2.730	2.560	2.200	1.950	2.390
089	2.955	2.785	2.425	2.175	2.615
092	3.030	2.860	2.500	2.250	2.690
104	3.330	3.160	2.800	2.55	2.990
122	3.780	3.610	3.250	3.000	3.440
152	4.530	4.360	4.000	3.750	4.190
206	5.880	5.710	5.350	5.100	5.540



ALTERNATE PWB MOUNTING VIA
HARDWARE (MOUNTING EARS
REMOVED)

**REFER TO APPENDIX FOR TERMINATION
DETAILS, HARDWARE STYLES, POLAR-
IZATION CHART, MOUNTING STYLES,
VARIATION CODES, AND PWB PATTERNS**