


**PLUG, STRAIGHT  
STYLE MBE, MDE, MSE, MVE, MWE**

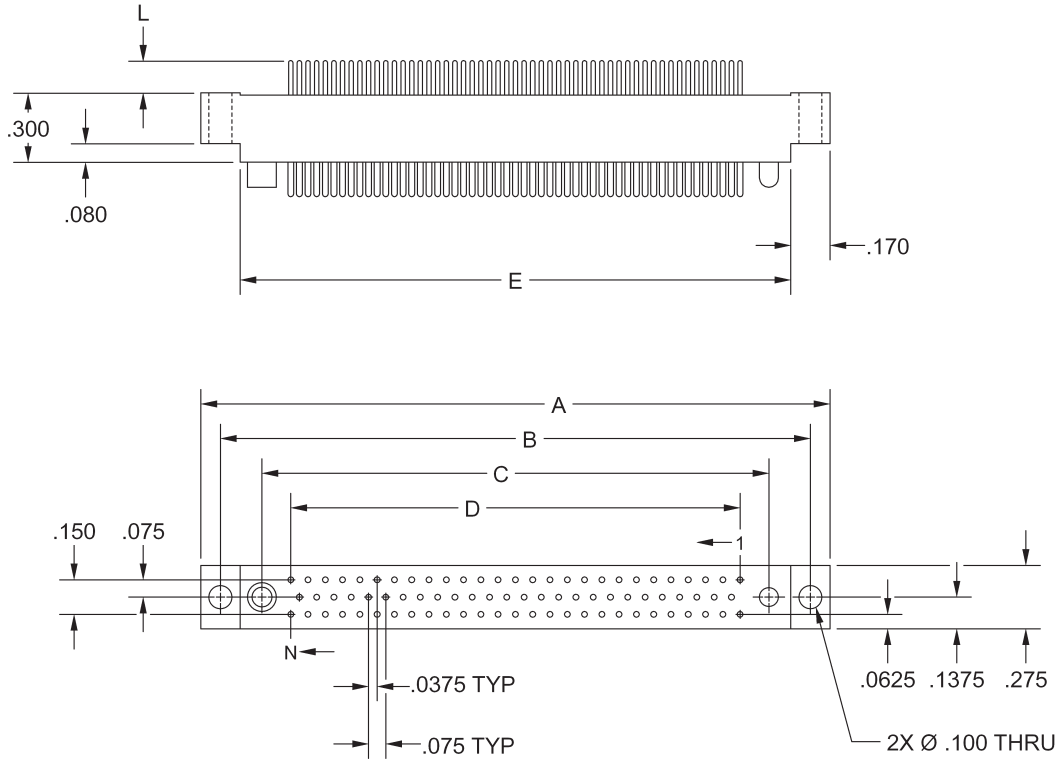

| DIMENSIONS   |       |       |       |       |       |
|--------------|-------|-------|-------|-------|-------|
| 'N' Contacts | A     | B     | C     | D     | E     |
| 011          | 1.005 | .835  | .475  | .225  | .665  |
| 023          | 1.305 | 1.135 | .775  | .525  | .965  |
| 035          | 1.605 | 1.435 | 1.075 | .825  | 1.265 |
| 047          | 1.905 | 1.735 | 1.375 | 1.125 | 1.565 |
| 059          | 2.205 | 2.035 | 1.675 | 1.425 | 1.865 |
| 071          | 2.505 | 2.335 | 1.975 | 1.725 | 2.165 |
| 080          | 2.730 | 2.560 | 2.200 | 1.950 | 2.390 |
| 089          | 2.955 | 2.785 | 2.425 | 2.175 | 2.615 |
| 092          | 3.030 | 2.860 | 2.500 | 2.250 | 2.690 |
| 104          | 3.330 | 3.160 | 2.800 | 2.55  | 2.990 |
| 122          | 3.780 | 3.610 | 3.250 | 3.000 | 3.440 |
| 152          | 4.530 | 4.360 | 4.000 | 3.750 | 4.190 |
| 206          | 5.880 | 5.710 | 5.350 | 5.100 | 5.540 |

**REFER TO APPENDIX FOR TERMINATION  
DETAILS, HARDWARE STYLES, POLAR-  
IZATION CHART, MOUNTING STYLES,  
VARIATION CODES, AND PWB PATTERNS**