


ORDERING CHART .075 X .075 SPACING

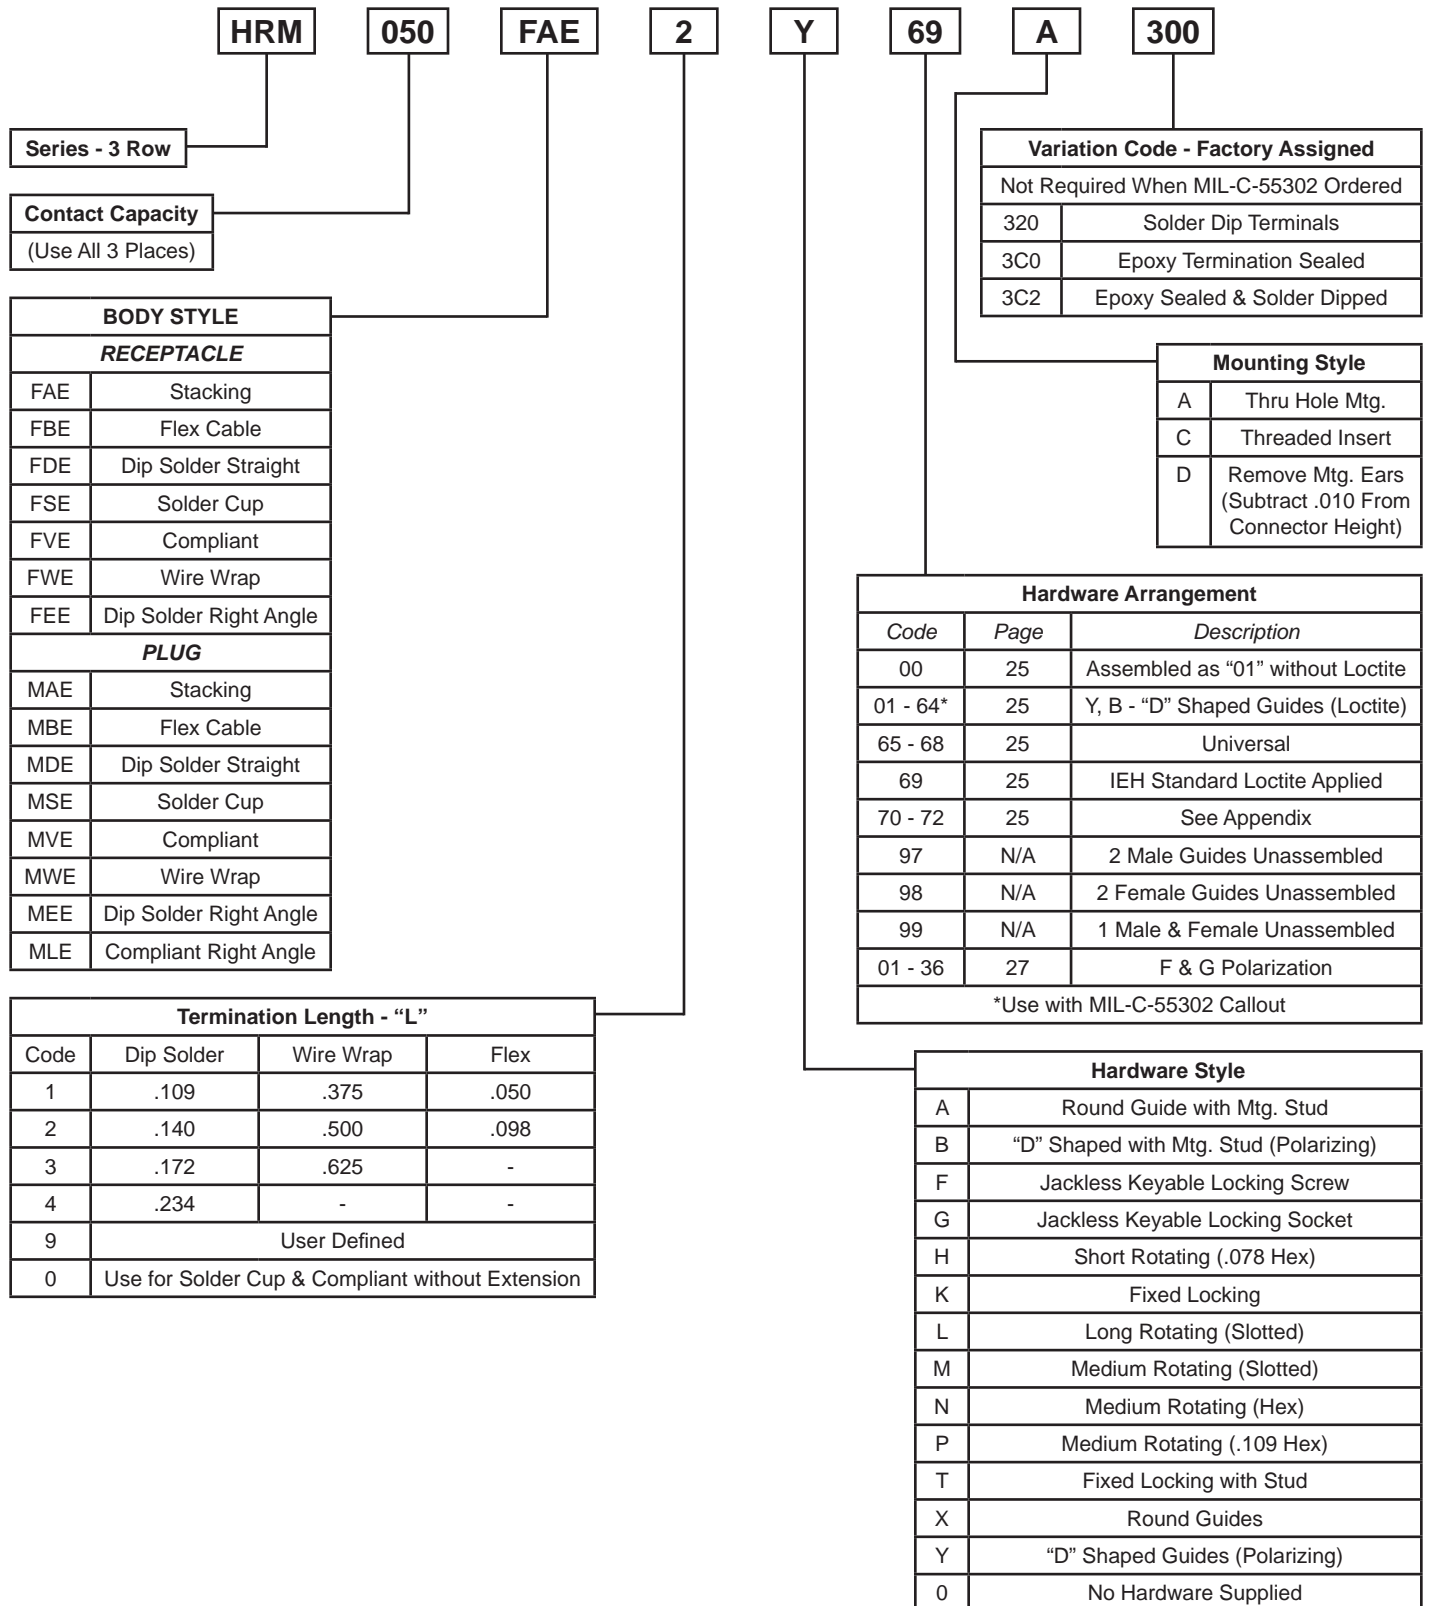

Series - 3 Row

Contact Capacity
(Use All 3 Places)

BODY STYLE	
RECEPTACLE	
FAE	Stacking
FBE	Flex Cable
FDE	Dip Solder Straight
FSE	Solder Cup
FVE	Compliant
FWE	Wire Wrap
FEE	Dip Solder Right Angle
PLUG	
MAE	Stacking
MBE	Flex Cable
MDE	Dip Solder Straight
MSE	Solder Cup
MVE	Compliant
MWE	Wire Wrap
MEE	Dip Solder Right Angle
MLE	Compliant Right Angle

Termination Length - "L"			
Code	Dip Solder	Wire Wrap	Flex
1	.109	.375	.050
2	.140	.500	.098
3	.172	.625	-
4	.234	-	-
9	User Defined		
0	Use for Solder Cup & Compliant without Extension		

Variation Code - Factory Assigned	
Not Required When MIL-C-55302 Ordered	
320	Solder Dip Terminals
3C0	Epoxy Termination Sealed
3C2	Epoxy Sealed & Solder Dipped

Mounting Style	
A	Thru Hole Mtg.
C	Threaded Insert
D	Remove Mtg. Ears (Subtract .010 From Connector Height)

Hardware Arrangement		
Code	Page	Description
00	25	Assembled as "01" without Loctite
01 - 64*	25	Y, B - "D" Shaped Guides (Loctite)
65 - 68	25	Universal
69	25	IEH Standard Loctite Applied
70 - 72	25	See Appendix
97	N/A	2 Male Guides Unassembled
98	N/A	2 Female Guides Unassembled
99	N/A	1 Male & Female Unassembled
01 - 36	27	F & G Polarization

*Use with MIL-C-55302 Callout

Hardware Style	
A	Round Guide with Mtg. Stud
B	"D" Shaped with Mtg. Stud (Polarizing)
F	Jackless Keyable Locking Screw
G	Jackless Keyable Locking Socket
H	Short Rotating (.078 Hex)
K	Fixed Locking
L	Long Rotating (Slotted)
M	Medium Rotating (Slotted)
N	Medium Rotating (Hex)
P	Medium Rotating (.109 Hex)
T	Fixed Locking with Stud
X	Round Guides
Y	"D" Shaped Guides (Polarizing)
0	No Hardware Supplied