



POLARIZATION CHART AS VIEWED FROM THE MATING FACE

01-36 USE FOR HARDWARE STYLE 'Y' & 'B'
More configurations available. Please consult with factory

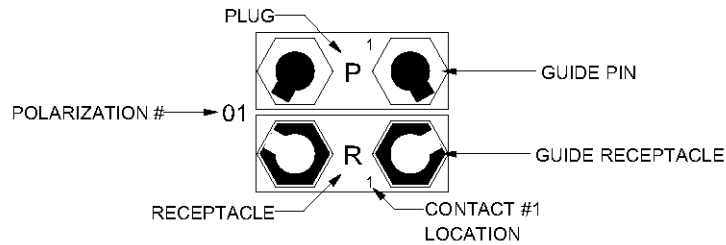

| | | | | | | | | | | | |
|----|--|----|--|----|--|----|--|----|--|----|--|
| 01 | | 07 | | 13 | | 19 | | 25 | | 31 | |
| 02 | | 08 | | 14 | | 20 | | 26 | | 32 | |
| 03 | | 09 | | 15 | | 21 | | 27 | | 33 | |
| 04 | | 10 | | 16 | | 22 | | 28 | | 34 | |
| 05 | | 11 | | 17 | | 23 | | 29 | | 35 | |
| 06 | | 12 | | 18 | | 24 | | 30 | | 36 | |

USE FOR OPTION: A,X



USE FOR OPTION: A,K,X,T,H



NOTE:

Style H Only Guide Pins
Style T Only Guide Sockets
Style K Only Guide Sockets